


Hoist With Hook Suspension



ALLMAN
INDUSTRY

250Kg-5Ton

- ① 3 meters lifting height and power supply cable as standard accompanies , can be made as your request .
- ② Canvas chain container is standard accompanies . Steel chain container is available if lifting height is more than capacity of the standard container volume .
- ③ Emergency stop button on the push button , push down it , the motor circuit will be cut off .
- ④ Single Voltage or Dual Voltage optional (220/380V, 220/440V etc.)
- ⑤ Control voltage : 24V/36V/48V optional .
- ⑥ Dual speed or single speed optional .
- ⑦ Single phase or three phase .
- ⑧ Working grade: M4 .
- ⑨ G80 , G100, or FEC Japan chain optional.
- ⑩ Remote control ,Travel limiter ,Overload limiter, Rain cover can be added .

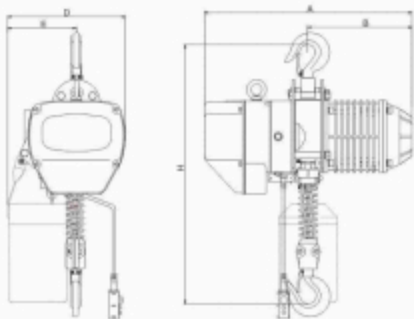

Single Speed

Technical Parameters

Model	AMEH											
	0.25-01S	0.5-01S	01-01S	1.5-01S	02-01S	02-02S	2.5-01S	03-01S	03-02S	03-03S	05-02S	
Capacity(t)	0.25	0.5	1	1.5	2		2.5	3		5		
Lifting Speed(m/min)	7.2	7.2	6.6	8.8	6.6	3.3	5.4	5.4	4.4	2.2	2.7	
Motor Power(kw)	0.8	0.8	1.5	3.0	3.0	1.5	3.0	3.0	3.0	1.5	3.0	
Rotation Speed(r/min)	1440											
Insulation Grade	F											
Power Supply	3P 220V-690V											
Control Voltage	24V/36V/48V											
No. of Chain	1	1	1	1	1	2	1	1	2	3	2	
Spec. of Load Chain	φ6.3	φ6.3	φ7.1	φ10.0	φ10.0	φ7.1	φ11.2	φ11.2	φ10.0	φ7.1	φ11.2	
Net Weight(kg)	45	47	61	108	110	73	103	115	127	89	138	
Basic Dimension (mm)	H	530	530	650	800	800	835	845	845	950	1030	
	A	480	460	520	615	615	520	615	615	520	615	
	B	230	230	260	295	295	260	295	295	260	295	
	D	288	288	300	430	430	300	430	430	430	350	430
	E	178	178	176	265	265	236	265	265	320	205	325

Dual Speed

Technical Parameters

Model	AMEH										
	0.25-01D	0.5-01D	01-01D	1.5-01D	02-01D	02-02D	2.5-01D	03-01D	03-02D	03-03D	05-02D
Capacity(t)	0.25	0.5	1	1.5	2		2.5	3		5	
Lifting Speed(m/min)	7.2/2.4	7.2/2.4	6.9/2.3	9.0/3.0	6.9/2.3	3.3/1.1	5.4/1.8	5.4/1.8	4.5/1.5	2.4/0.8	2.7/0.9
Motor Power(kw)	0.8/0.27	0.8/0.27	1.8/0.6	3.0/1.0	3.0/1.0	1.8/0.6	3.0/1.0	3.0/1.0	3.0/1.0	1.8/0.6	3.0/1.0
Rotation Speed(r/min)	2880/960										
Insulation Grade	F										
Power Supply	3P 220V-690V										
Control Voltage	24V/36V/48V										
No. of Chain	1	1	1	1	1	2	1	1	2	3	2
Spec. of Load Chain	φ6.3	φ6.3	φ7.1	φ10.0	φ10.0	φ7.1	φ11.2	φ11.2	φ10.0	φ7.1	φ11.2
Net Weight(kg)	52	54	71	114	150	86	148	159	168	102	184
Basic Dimension (mm)	H	530	530	650	800	800	835	845	845	950	1030
	A	545	545	582	670	670	582	670	670	615	582
	B	260	260	280	313	313	280	313	313	313	280
	D	288	288	300	430	430	300	430	430	430	350
	E	178	178	178	265	265	236	265	265	320	205